


POSITIVE OUTPUT WHEN THE LOADING IS APPLIED TO THE TOOL SIDE OF THE LOADCELL, PER COORDINATE SYSTEM AS SHOWN

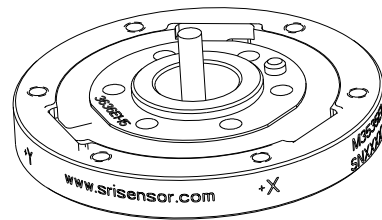

	Fx	Fy	Fz	Mx	My	Mz
CAPACITY (N/Nm)	200.0	200.0	300.0	22.0	22.0	30
OUTPUT (mV/V)	COUPLED OUTPUT					
BRIDGE RES. (Ω)	350	700	350	700	350	700

SPECIFICATIONS	
EXCITATION MAX. (V)	7
OVERLOAD CAPACITY (%F.S.)	150
FREE AIR RESONANT FREQ. (HZ.)	3100
CROSSTALK (%F.S.)	3.0
NON-LINEARITY (%F.S.)	1.0
HYSTERESIS (%F.S.)	1.0
OPERATING TEMP. RANGE (°C)	-40 TO +90
COMPENSATED TEMP. RANGE (°C)	10 TO 70
MASS (KG)	0.19

WIRING CODE - TWISTED PAIR						
FUNC	CHN1	CHN2	CHN3	CHN4	CHN5	CHN6
+SIG	WHITE (BROWN)	ORG (BROWN)	BLUE (BROWN)	YEL (BROWN)	RED (BROWN)	WHITE (BLACK)
-SIG	BROWN (WHITE)	BROWN (ORG)	BROWN (BLUE)	BROWN (YEL)	BROWN (RED)	BLACK (WHITE)
+EXC	RED (BLACK)					
-EXC	BLACK (RED)					
"YEL"="YELLOW", "ORG"="ORANGE", "WHITE (BROWN)" = WHITE CABLE IN WHITE/BROWN PAIR						

SUNRISE INSTRUMENTS
www.srisensor.com

SIX AXIS CIRCULAR LOAD CELL
EXTRA THIN, D70MM F200N

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM	M3535E1	REV. 0.1
--	---------	-------------