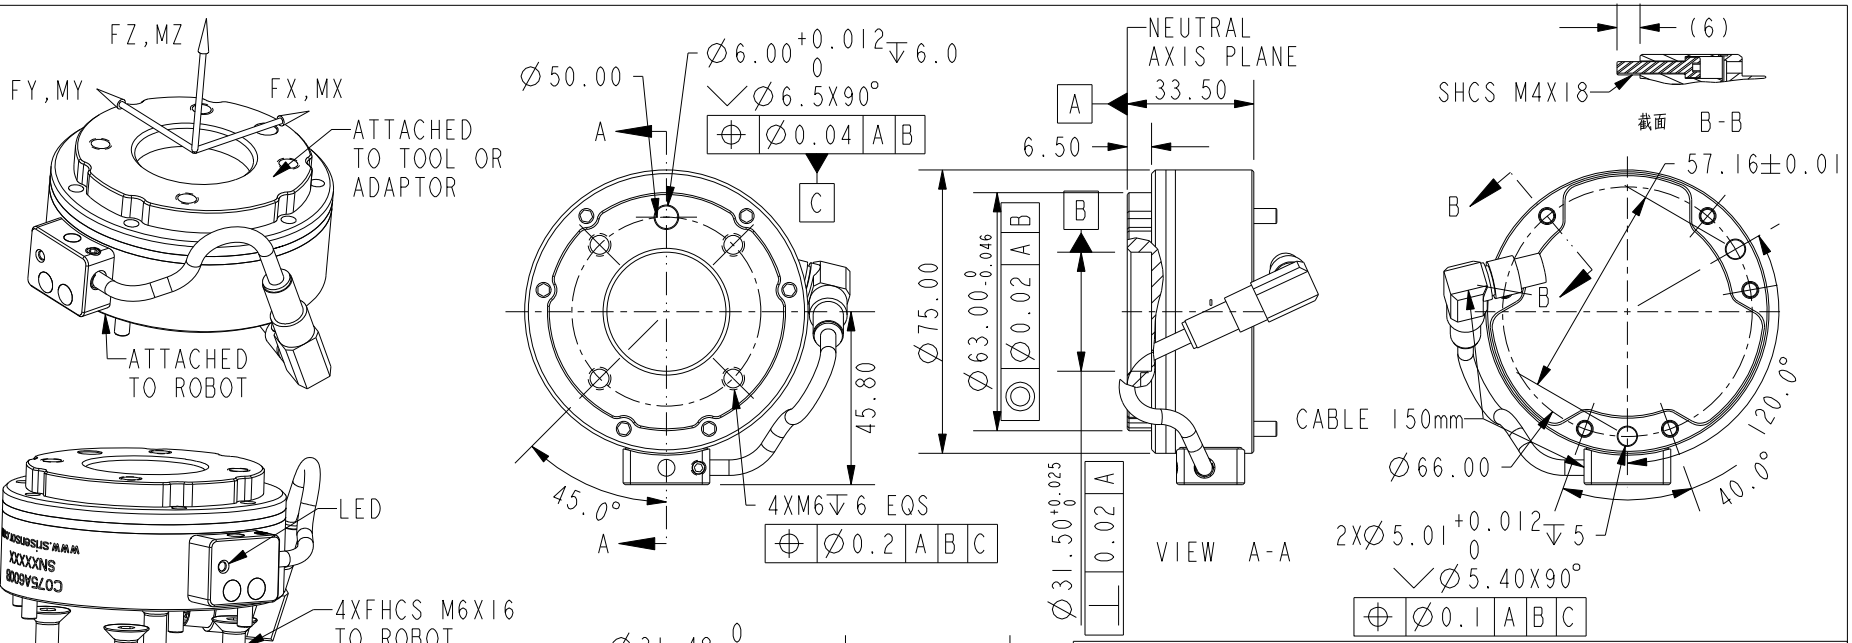


SPECIFICATIONS		
POWER SUPPLY (CUSTOMZABLE)		24±1VDC (TYP)
POWER CONSUMPTION (W)		3
INSULATION RESISTANCE		≥5000MΩ
SAMPLING RATE (Hz) MAX		2000
CROSSTALK (%F.S.)		2
NON-LINEARITY (%F.S.)		0.5
HYSTERESIS (%F.S.)		0.5
OPERATING TEMP. RANGE (°C)		-40 TO +100
COMPENSATED TEMP. RANGE (°C)		10 TO 70
CAPACITY	Fx=Fy=Fz	600N
	Mx=My=Mz	60Nm
OVERLOAD CAPACITY (%F.S.)		300
MATERIAL		AL ALLOY
IP PROTECION		IP60
MASS (KG) NOT INCLUDING ADAPTOR		0.27

M8 CONNECTOR PIN ASSIGNMENT			
PIN #	FUNCTION	PIN #	FUNCTION
1 ORANGE	24±1V	5 YELLOW	RS485B
2 BLACK	RX	6 GREEN	NA
3 BLUE	TX	7 GRAY	NA
4 WHITE	RS485A	8 BROWN	GND

LED STATUS	SENSOR STATUS
OFF	POWER OFF
FLIKER	WORK PROPERLY
ON	ABNORMAL

PEAK-TO-PEAK NOISE = 6.6 X RMS NOISE (EFFECTIVE RESOLUTION)
NOISE IS MEASURED AT SAMPLING RATE 200HZ

PEAK-TO-PEAK NOISE	0.58N	0.58N	0.42N	0.014Nm	0.014Nm	0.016Nm
EFFECTIVE RESOLUTION	0.09N	0.09N	0.06N	0.002Nm	0.002Nm	0.002Nm

SUNRISE INSTRUMENTS

www.srisensor.com

SIX AXIS CIRCULAR LOAD CELL
D75MM, DIGITAL(RS485) OUTPUT

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM	C075A600B	REV. 0.1