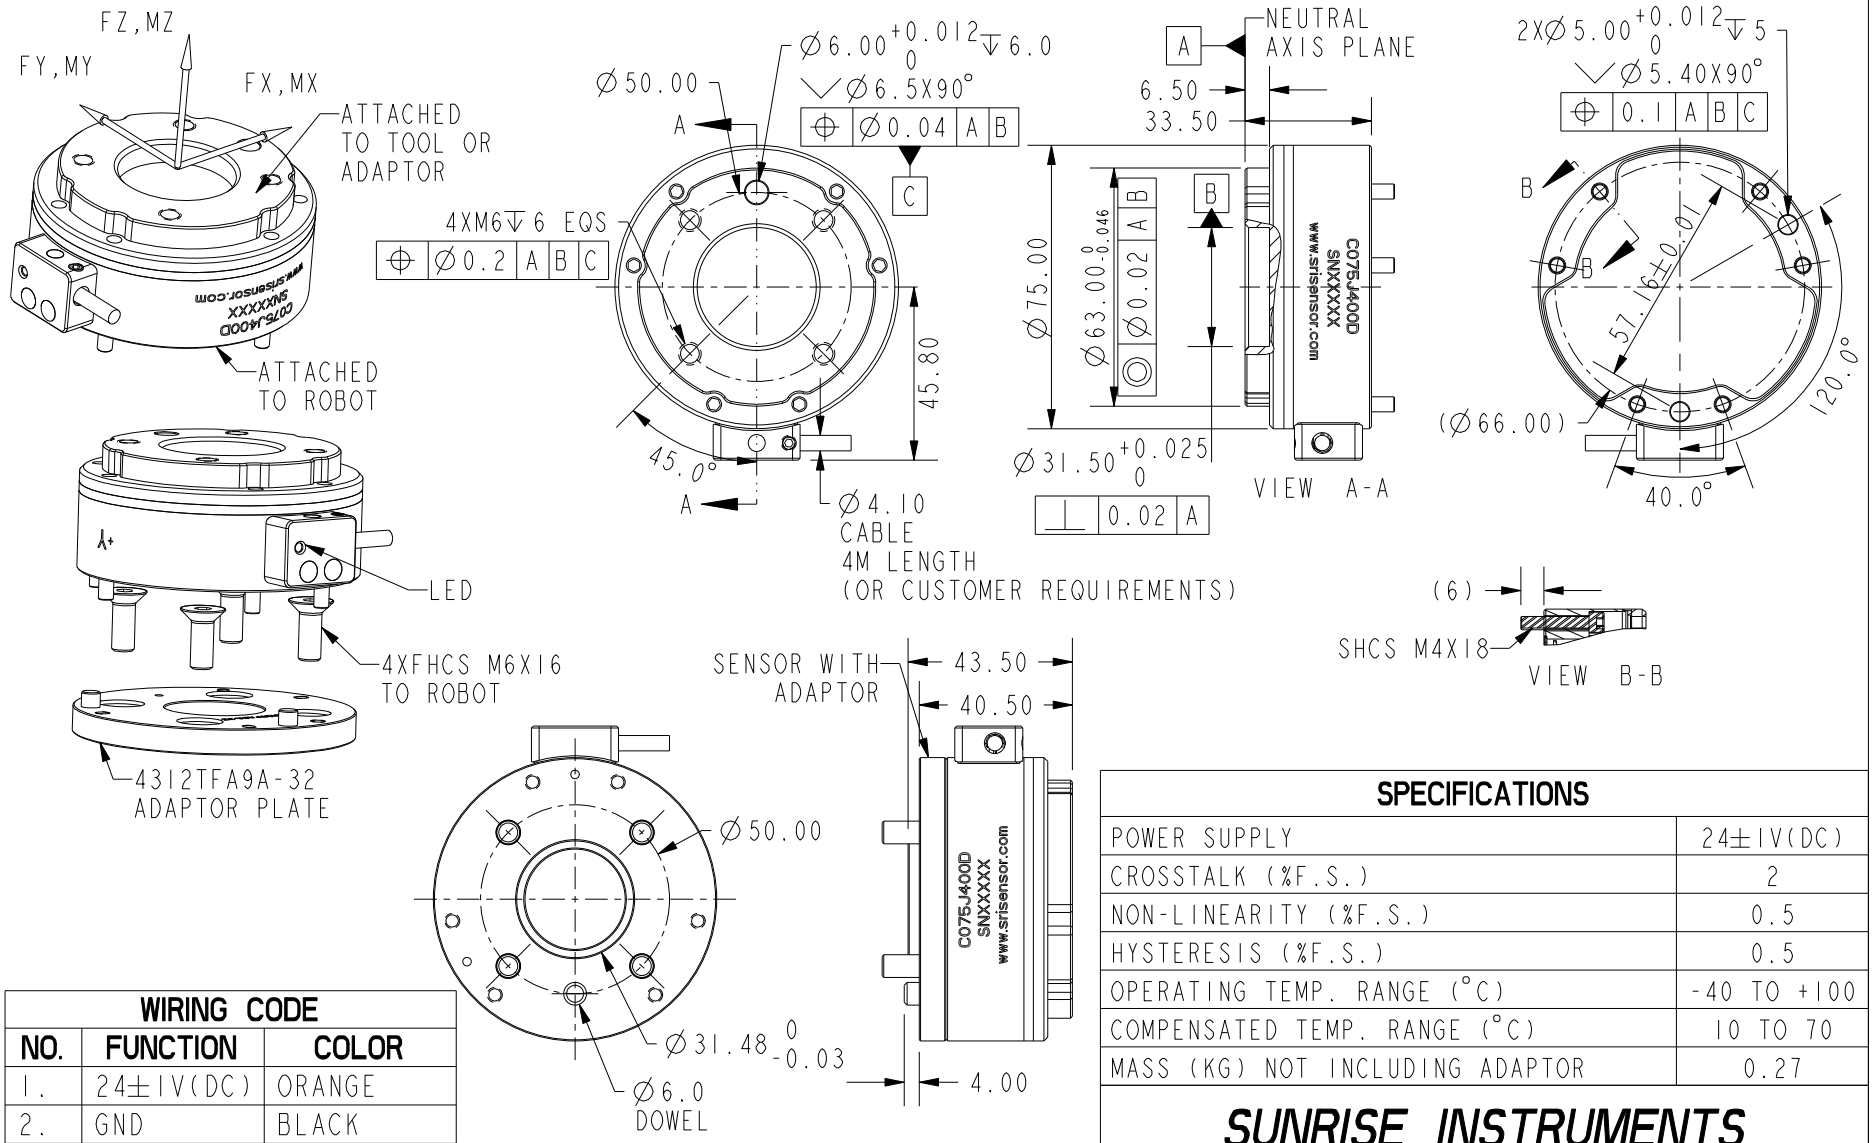

SPECIFICATIONS	
POWER SUPPLY	24±1V(DC)
CROSSTALK (%F.S.)	2
NON-LINEARITY (%F.S.)	0.5
HYSTERESIS (%F.S.)	0.5
OPERATING TEMP. RANGE (°C)	-40 TO +100
COMPENSATED TEMP. RANGE (°C)	10 TO 70
MASS (KG) NOT INCLUDING ADAPTOR	0.27

WIRING CODE		
NO.	FUNCTION	COLOR
1.	24±1V(DC)	ORANGE
2.	GND	BLACK
3.	CAN_H	YELLOW
4.	CAN_L	GREEN
5.	RS232_TX	BROWN
6.	RS232_RX	GRAY

LED STATUS	SENSOR STATUS
OFF	POWER OFF
FLIKER	WORK PROPERLY
ON	ABNORMAL

	Fx	Fy	Fz	Mx	My	Mz
CAPACITY (N/Nm)	400N	400N	400N	40Nm	40Nm	40Nm
OVERLOAD CAPACITY	1200N	1200N	1200N	120Nm	120Nm	120Nm

SUNRISE INSTRUMENTS

www.srisensor.com

SIX AXIS CIRCULAR LOAD CELL
D75MM, CAN OUTPUT

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM	C075J400D	REV. 0.1