
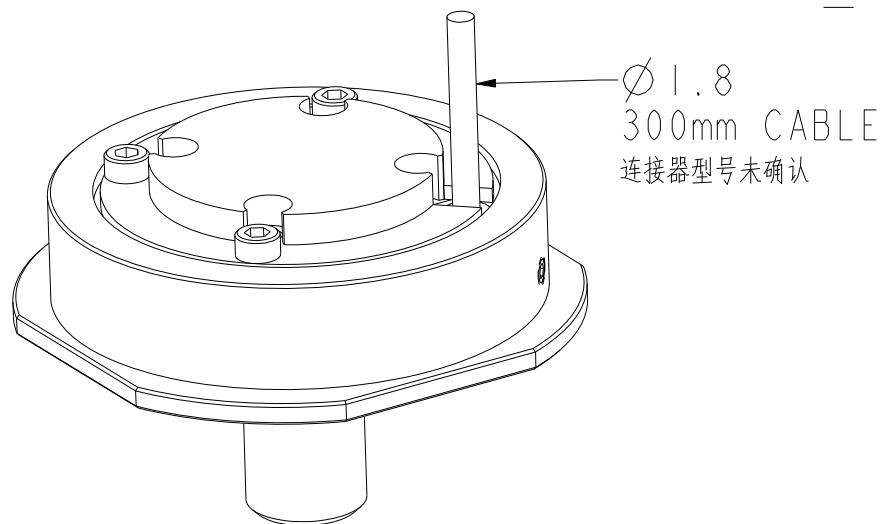


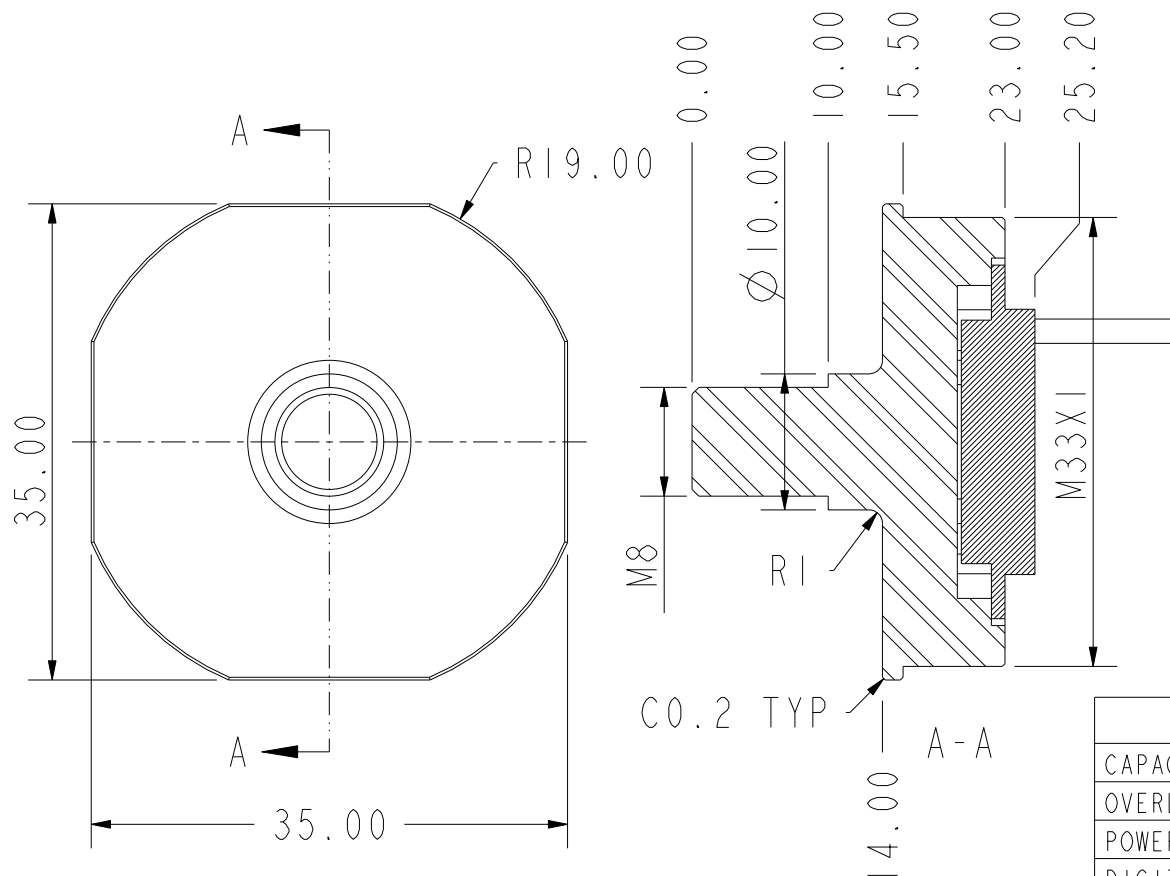

SPECIFICATIONS

CAPACITY (N)	8000
OVERLOAD CAPACITY (%F.S.)	120
POWER SUPPLY (V)	5 $\pm$ 0.1V, 250MA
DIGITAL OUTPUT	RS485
NON-LINEARITY (%F.S.)	0.5
HYSTERESIS (%F.S.)	0.5
OPERATING TEMP. RANGE (°C)	-20 TO +100
CROSSTALK (%F.S.)	N/A
MASS (g)	54

SUNRISE INSTRUMENTS

www.srisensor.com

UNIAXIAL LOADCELL 8000N
RS485 OUTPUT

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN MM

M3624F

REV.
0.2